


FTTX Fiber Management


F0DB-0416A Fiber Access Terminal Closure

Description---FATM-0416L fiber access termination closure is able to hold up to 16 subscribers and 96 splicing points as closure. It is used as a splicing closure and a termination point for the feeder cable to connect with drop cable in FTTX network system. It integrates fiber splicing, splitting, distribution, storage and cable connection in one solid protection box.

Features---

- Water-proof design with IP-65 Protection Level.
- Integrated with flap-up splice cassette and adaptor holder
- All stainless metal plate and anti-rusting bolts, nuts
- Fiber bend radius control more than 40mm
- Suitable for the fusion splicer or mechanical splice
- 2Pcs of 1*8 Splitter can be installed as an option
- Mechanical sealing structure and mid-span cable entry.
- 16 ports cable entrance for drop cable
- 16 adapter for drop cable patching

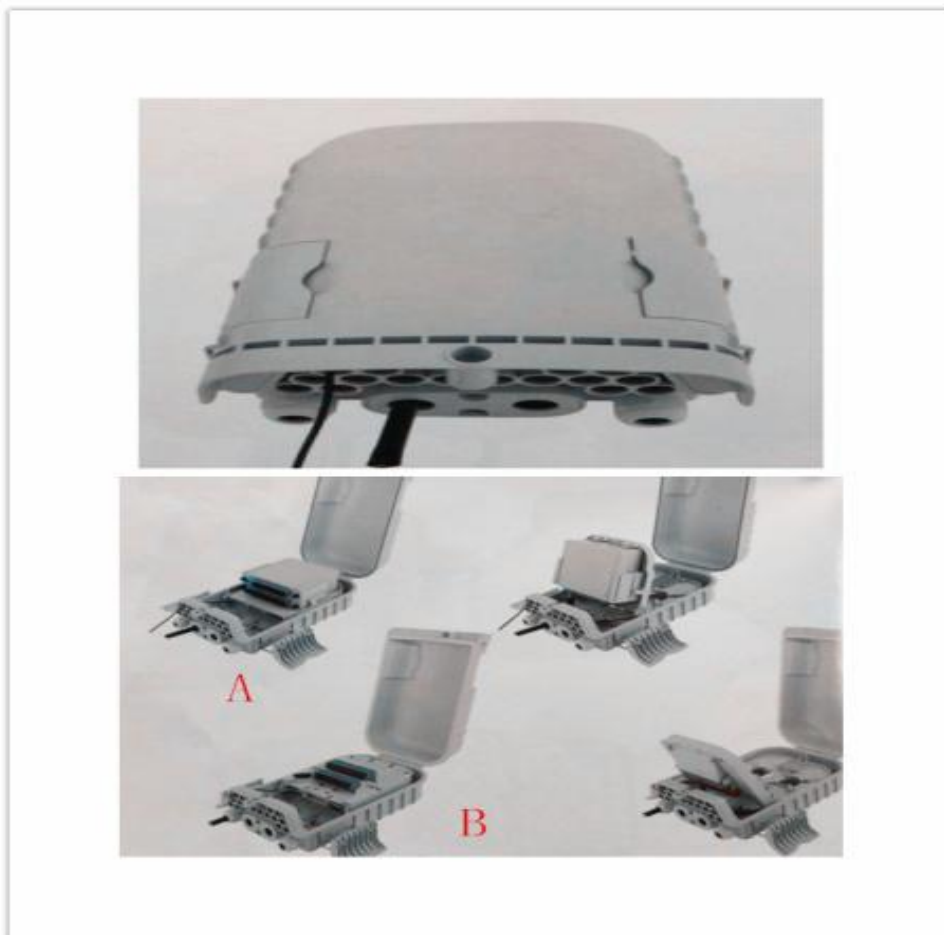

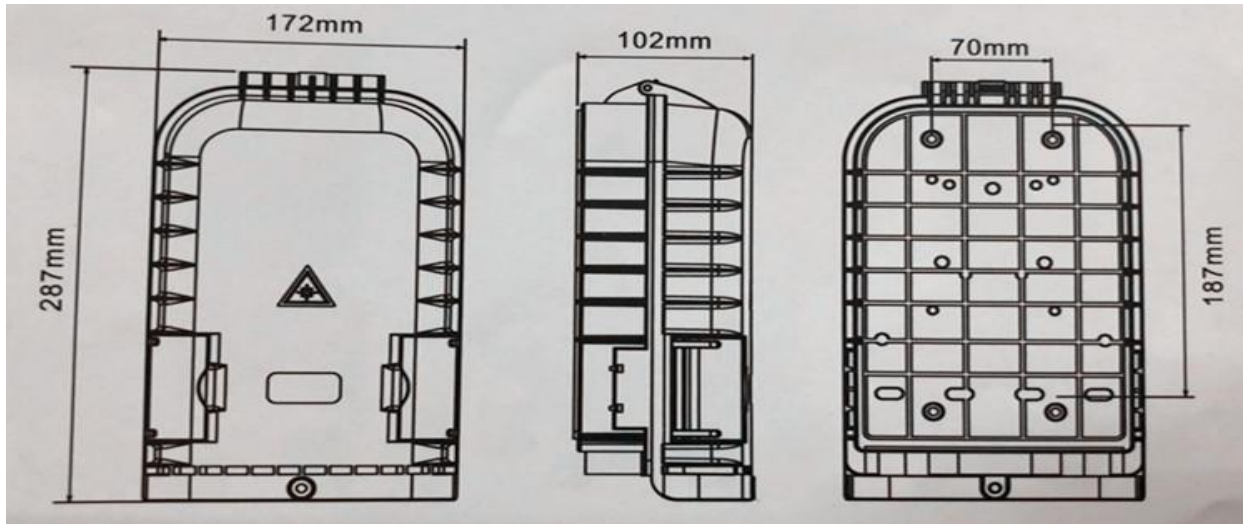

Configuration

| Material | Size | Max Capacity | | Nos of Adaptor | Wight | Color |
|----------|--------------------------|---|----------------------------|----------------|--------|------------|
| ABS/PC | A*B*C(MM) 287*172*102 | Splice 16 Fibers (1trays, 16fiber/tray) | 2pc of 1*8 PLC Splitter | 16pc of SC | 1.15kg | Grey/black |

Applications---

- Wall mounting and pole mounting installation
- FTTH pre-installation and filed installation
- 2*3mm indoor FTTH drop cable and outdoor figure-8FTTH self-supporting drop cable

Standard Accessories---

Splice cassette and cable management tool, installation nuts and bolts, protection sleeves hose clamp, cable tube, wrench, cover, holder, rubber seal for cable entrance